


DOMINATOR

16'-Pole Specification Sheet

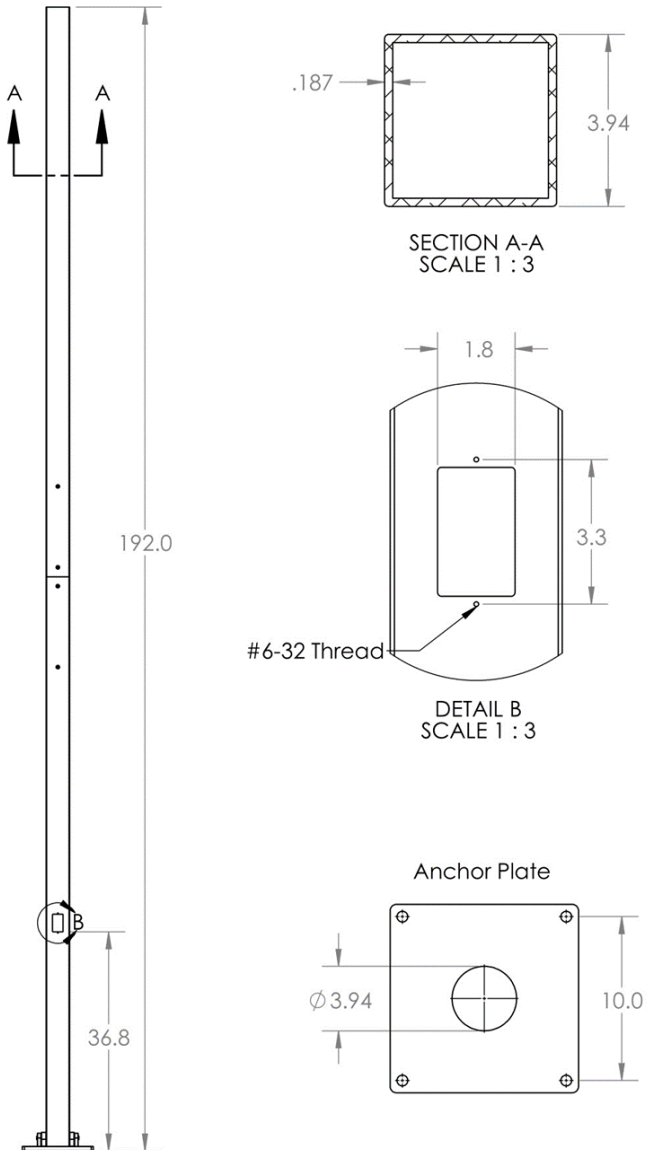

Pole: Square profile extrusions made from high-strength Aluminum 6061 T6. The light pole assembly is rust proof.

Pole Top: Designed to accommodate slip-fit tenons and drill mounted tenons.

Anchor Bolt Pattern: 10"x10" square pattern.

Anchor Bolts: Each light pole comes with 4, 5/8"-11 x 18" hot dipped galvanized L-bolts. Each bolt comes with three hex nuts, two flat washers, and a split lock washer.

Anchor Base: The light pole assembly hinges on a 304 stainless steel dowel to allow for easy setup and maintenance.

Anchor Cover: Two-part, black molded plastic square cover.

Hand Hole: Comes with aluminum plate hand hole cover and pre-drilled mounting holes for easy installation of switches and outlets. Fits standard outlets and light switches.

Hardware: All hardware is made from corrosion resistant stainless steel.

Design Criteria: EPA ratings calculated using the 2015 AASHTO-LTS1 standard based off load conditions for Category C exposure under 33 ft with a 1.3 gust factor. Designed for top and side mount attachments only. Do not attach banners, cameras, flags, or other obstructions to the pole. Contact the manufacturer for poles with a net attachment. The pole must be attached to a base of adequate design.

Disclaimers: HomeSports LLC, is not responsible for any claims due to improper use, poor foundation design, improper installation or assembly, and improper loading. Furthermore, HomeSports LLC takes no responsibility for system implementation, assembly, or installation. HomeSports LLC, is not responsible for any electrical components or wiring of the light pole system. Consult local codes and professionals for correct wiring and grounding practices.

Maximum EPA with 1.3 Gust Factor (ft ²)				
80 mph	90 mph	100 mph	110 mph	120 mph
14.8	11.6	8.6	6.6	5.2

Pole Weight (lbs.)
70